


# Automatic burettes Pellet

## Class AS - with intermediate stopcock

- main point ring graduation
- DIN EN ISO 385
- DE-M marked according to the German calibration law
- lateral and intermediate stopcock
- made of borosilicate glass 3.3
- inclusive batch certificate
- 2L reservoir bottle

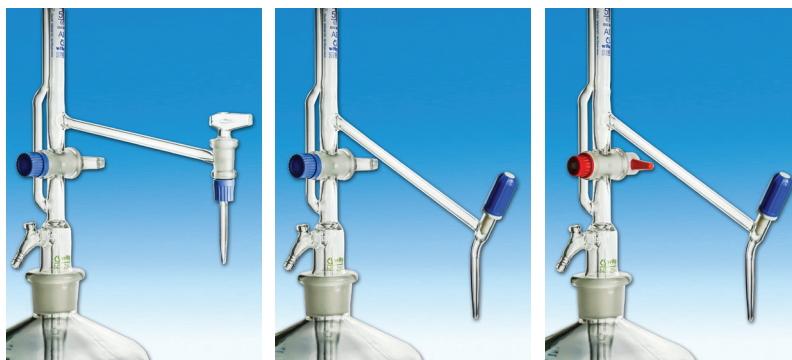


Capacity ml	Division ml	Tolerance ml	Stopcocks	Order number	
				blue graduation Schellbach blue line	amber glass white graduation
10	0.02	±0.02	intermediate: ST-glass plug lateral: solid ST-glass plug	3 122 106	3 124 106
25	0.05	±0.03		3 122 256	3 124 256
50	0.1	±0.05		3 122 506	3 124 506
10	0.02	±0.02	intermediate: ST-glass plug lateral: PTFE needle valve	3 122 107	3 124 107
25	0.05	±0.03		3 122 257	3 124 257
50	0.1	±0.05		3 122 507	3 124 507
10	0.02	±0.02	intermediate: ST-PTFE plug lateral: PTFE needle valve	3 122 108	3 124 108
25	0.05	±0.03		3 122 258	3 124 258
50	0.1	±0.05		3 122 508	3 124 508

for brown graduation add „B“ behind the order number (not available for amber glass)

## Class AS

- main point ring graduation
- without intermediate stopcock
- DIN EN ISO 385
- DE-M marked according to the German calibration law
- lateral stopcock
- made of borosilicate glass 3.3
- inclusive batch certificate
- 2L reservoir bottle

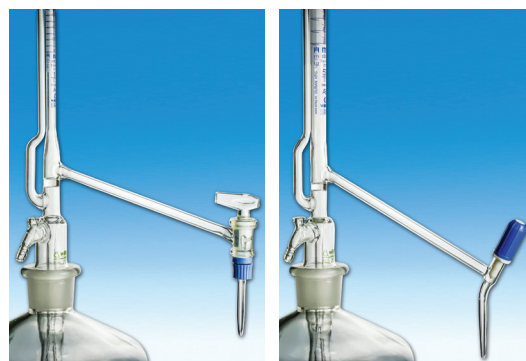

Capacity ml	Division ml	Tolerance ml	Stopcock	Order number	
				blue graduation Schellbach blue line	amber glass white graduation
10	0.02	±0.02	lateral: solid ST-glass plug	3 122 104	3 124 104
25	0.05	±0.03		3 122 254	3 124 254
50	0.1	±0.05		3 122 504	3 124 504
10	0.02	±0.02	lateral: PTFE needle valve	3 122 105	3 124 105
25	0.05	±0.03		3 122 255	3 124 255
50	0.1	±0.05		3 122 505	3 124 505

for brown graduation add „B“ behind the order number (not available for amber glass)



All automatic burettes Pellet are available with amber glass and white graduation.