


# Automatic burettes Pellet

## Class B - with intermediate stopcock

- short line graduation
- DIN EN ISO 385
- error ranges are better than the DIN EN ISO 385 requirements
- lateral and intermediate stopcock
- made of borosilicate glass 3.3
- 2L reservoir bottle

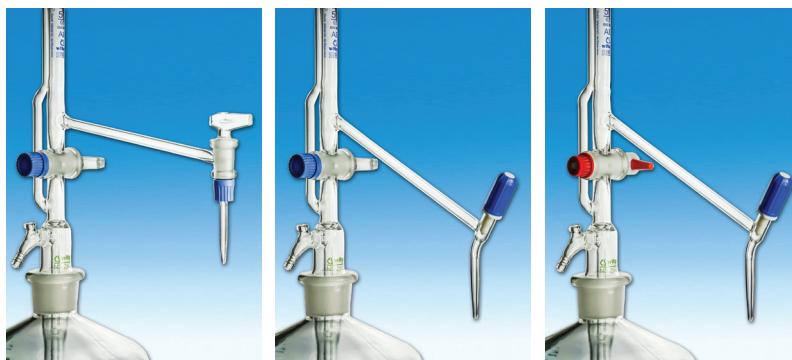


| Capacity<br>ml | Division<br>ml | Tolerance   |           | Stopcocks   | Order number                            |                                 |
|----------------|----------------|-------------|-----------|---|---|---------------------------------|
|                |                | witeg<br>ml | ISO<br>ml |   | blue graduation<br>Schellbach blue line | amber glass<br>white graduation |
| 10             | 0.02           | ±0.03       | ±0.05     | intermediate: ST-glass plug<br>lateral: solid ST-glass plug | 3 112 106                               | 3 114 106                       |
| 25             | 0.05           | ±0.03       | ±0.05     |   | 3 112 256                               | 3 114 256                       |
| 50             | 0.1            | ±0.08       | ±0.1      |   | 3 112 506                               | 3 114 506                       |
| 100            | 0.2            | ±0.2        | ±0.2      |   | 3 112 906                               | 3 114 906                       |
| 10             | 0.02           | ±0.03       | ±0.05     | intermediate: ST-glass plug<br>lateral: PTFE needle valve   | 3 112 107                               | 3 114 107                       |
| 25             | 0.05           | ±0.03       | ±0.05     |   | 3 112 257                               | 3 114 257                       |
| 50             | 0.1            | ±0.08       | ±0.1      |   | 3 112 507                               | 3 114 507                       |
| 100            | 0.2            | ±0.2        | ±0.2      |   | 3 112 907                               | 3 114 907                       |
| 10             | 0.02           | ±0.03       | ±0.05     | intermediate: ST-PTFE plug<br>lateral: PTFE needle valve    | 3 112 108                               | 3 114 108                       |
| 25             | 0.05           | ±0.03       | ±0.05     |   | 3 112 258                               | 3 114 258                       |
| 50             | 0.1            | ±0.08       | ±0.1      |   | 3 112 508                               | 3 114 508                       |
| 100            | 0.2            | ±0.2        | ±0.2      |   | 3 112 908                               | 3 114 908                       |

for brown graduation add „B“ behind the order number (not available for amber glass)

## Class B

- short line graduation
- without intermediate stopcock
- DIN EN ISO 385
- error ranges are better than the DIN EN ISO 385 requirements
- lateral stopcock
- made of borosilicate glass 3.3
- 2L reservoir bottle

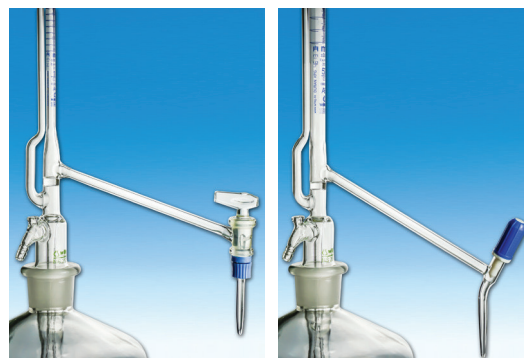

| Capacity<br>ml | Division<br>ml | Tolerance   |           | Stopcock                     | Order number                            |                                 |
|----------------|----------------|-------------|-----------|------------------------------|---|---------------------------------|
|                |                | witeg<br>ml | ISO<br>ml |                              | blue graduation<br>Schellbach blue line | amber glass<br>white graduation |
| 10             | 0.02           | ±0.03       | ±0.05     | lateral: solid ST-glass plug | 3 102 104                               | 3 104 104                       |
| 25             | 0.05           | ±0.04       | ±0.05     |                              | 3 102 254                               | 3 104 254                       |
| 50             | 0.1            | ±0.08       | ±0.1      |                              | 3 102 504                               | 3 104 504                       |
| 100            | 0.2            | ±0.2        | ±0.2      |                              | 3 102 904                               | 3 104 904                       |
| 10             | 0.02           | ±0.03       | ±0.05     | lateral: PTFE needle valve   | 3 102 105                               | 3 104 105                       |
| 25             | 0.05           | ±0.04       | ±0.05     |                              | 3 102 255                               | 3 104 255                       |
| 50             | 0.1            | ±0.08       | ±0.1      |                              | 3 102 505                               | 3 104 505                       |
| 100            | 0.2            | ±0.2        | ±0.2      |                              | 3 102 905                               | 3 104 905                       |

for brown graduation add „B“ behind the order number (not available for amber glass)