


Class B - straight stopcocks

- short line graduation
- DIN EN ISO 385
- error ranges are better than the DIN EN ISO 385 requirements
- made of borosilicate glass 3.3

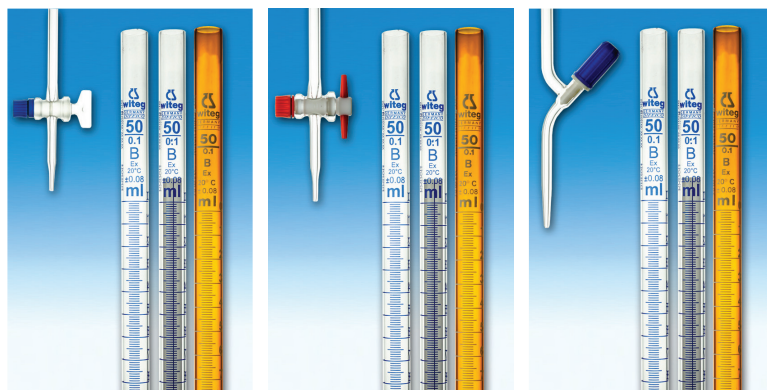


Capacity ml	Division ml	Tolerance		Plug	Order number		
		witeg ml	ISO ml		blue graduation	blue graduation Schellbach blue line	amber glass white graduation
5	0.02	±0.02	±0.02	solid ST-glass	3 000 052	3 002 052	3 004 052
10	0.02	±0.03	±0.05		3 000 102	3 002 102	3 004 102
25	0.05	±0.04	±0.05		3 000 252	3 002 252	3 004 252
50	0.1	±0.08	±0.1		3 000 502	3 002 502	3 004 502
100	0.2	±0.2	±0.2		3 000 902	3 002 902	3 004 902
5	0.02	±0.02	±0.02	ST-PTFE	3 000 053	3 002 053	3 004 053
10	0.02	±0.03	±0.05		3 000 103	3 002 103	3 004 103
25	0.05	±0.04	±0.05		3 000 253	3 002 253	3 004 253
50	0.1	±0.08	±0.1		3 000 503	3 002 503	3 004 503
100	0.2	±0.2	±0.2		3 000 903	3 002 903	3 004 903
5	0.02	±0.02	±0.02	PTFE needle valve	3 000 057	3 002 057	3 004 057
10	0.02	±0.03	±0.05		3 000 107	3 002 107	3 004 107
25	0.05	±0.04	±0.05		3 000 257	3 002 257	3 004 257
50	0.1	±0.08	±0.1		3 000 507	3 002 507	3 004 507
100	0.2	±0.2	±0.2		3 000 907	3 002 907	3 004 907

for brown graduation add „B“ behind the order number (not available for amber glass)

Class B - lateral stopcocks

- short line graduation
- DIN EN ISO 385
- error ranges are better than the DIN EN ISO 385 requirements
- made of borosilicate glass 3.3

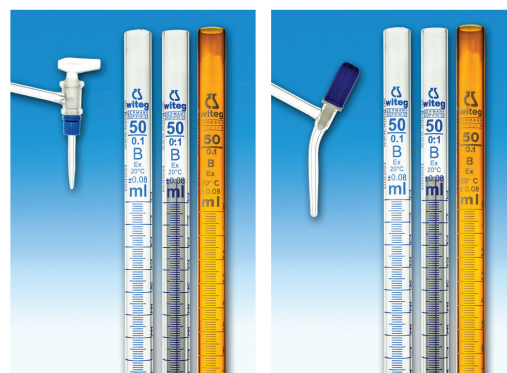

Capacity ml	Division ml	Tolerance		Plug	Order number		
		witeg ml	ISO ml		blue graduation	blue graduation Schellbach blue line	amber glass white graduation
5	0.02	±0.02	±0.02	solid ST-glass	3 000 054	3 002 054	3 004 054
10	0.02	±0.03	±0.05		3 000 104	3 002 104	3 004 104
25	0.05	±0.04	±0.05		3 000 254	3 002 254	3 004 254
50	0.1	±0.08	±0.1		3 000 504	3 002 504	3 004 504
100	0.2	±0.2	±0.2		3 000 904	3 002 904	3 004 904
5	0.02	±0.02	±0.02	ST-PTFE	3 000 055	3 002 055	3 004 055
10	0.02	±0.03	±0.05		3 000 105	3 002 105	3 004 105
25	0.05	±0.04	±0.05		3 000 255	3 002 255	3 004 255
50	0.1	±0.08	±0.1		3 000 505	3 002 505	3 004 505
100	0.2	±0.2	±0.2		3 000 905	3 002 905	3 004 905
5	0.02	±0.02	±0.02	ST-glass two-way stopcock	3 000 056	3 002 056	3 004 056
10	0.02	±0.03	±0.05		3 000 106	3 002 106	3 004 106
25	0.05	±0.04	±0.05		3 000 256	3 002 256	3 004 256
50	0.1	±0.08	±0.1		3 000 506	3 002 506	3 004 506
100	0.2	±0.2	±0.2		3 000 906	3 002 906	3 004 906

for brown graduation add „B“ behind the order number (not available for amber glass)