


Class B - straight stopcocks

- short line graduation
- DIN EN ISO 385
- error ranges are better than the DIN EN ISO 385 requirements
- made of borosilicate glass 3.3

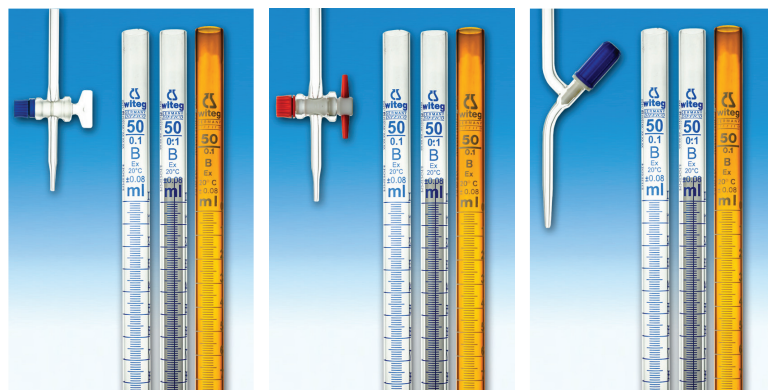


| Capacity ml | Division ml | Tolerance | | Plug | Order number | | |
|----------------|----------------|-------------|-----------|-------------------|-----------------|---|---------------------------------|
| | | witeg ml | ISO ml | | blue graduation | blue graduation Schellbach blue line | amber glass white graduation |
| 5 | 0.02 | ±0.02 | ±0.02 | solid ST-glass | 3 000 052 | 3 002 052 | 3 004 052 |
| 10 | 0.02 | ±0.03 | ±0.05 | | 3 000 102 | 3 002 102 | 3 004 102 |
| 25 | 0.05 | ±0.04 | ±0.05 | | 3 000 252 | 3 002 252 | 3 004 252 |
| 50 | 0.1 | ±0.08 | ±0.1 | | 3 000 502 | 3 002 502 | 3 004 502 |
| 100 | 0.2 | ±0.2 | ±0.2 | | 3 000 902 | 3 002 902 | 3 004 902 |
| 5 | 0.02 | ±0.02 | ±0.02 | ST-PTFE | 3 000 053 | 3 002 053 | 3 004 053 |
| 10 | 0.02 | ±0.03 | ±0.05 | | 3 000 103 | 3 002 103 | 3 004 103 |
| 25 | 0.05 | ±0.04 | ±0.05 | | 3 000 253 | 3 002 253 | 3 004 253 |
| 50 | 0.1 | ±0.08 | ±0.1 | | 3 000 503 | 3 002 503 | 3 004 503 |
| 100 | 0.2 | ±0.2 | ±0.2 | | 3 000 903 | 3 002 903 | 3 004 903 |
| 5 | 0.02 | ±0.02 | ±0.02 | PTFE needle valve | 3 000 057 | 3 002 057 | 3 004 057 |
| 10 | 0.02 | ±0.03 | ±0.05 | | 3 000 107 | 3 002 107 | 3 004 107 |
| 25 | 0.05 | ±0.04 | ±0.05 | | 3 000 257 | 3 002 257 | 3 004 257 |
| 50 | 0.1 | ±0.08 | ±0.1 | | 3 000 507 | 3 002 507 | 3 004 507 |
| 100 | 0.2 | ±0.2 | ±0.2 | | 3 000 907 | 3 002 907 | 3 004 907 |

for brown graduation add „B“ behind the order number (not available for amber glass)

Class B - lateral stopcocks

- short line graduation
- DIN EN ISO 385
- error ranges are better than the DIN EN ISO 385 requirements
- made of borosilicate glass 3.3

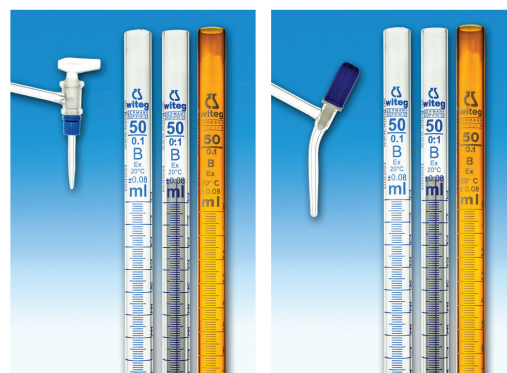

| Capacity ml | Division ml | Tolerance | | Plug | Order number | | |
|----------------|----------------|-------------|-----------|------------------------------|-----------------|---|---------------------------------|
| | | witeg ml | ISO ml | | blue graduation | blue graduation Schellbach blue line | amber glass white graduation |
| 5 | 0.02 | ±0.02 | ±0.02 | solid ST-glass | 3 000 054 | 3 002 054 | 3 004 054 |
| 10 | 0.02 | ±0.03 | ±0.05 | | 3 000 104 | 3 002 104 | 3 004 104 |
| 25 | 0.05 | ±0.04 | ±0.05 | | 3 000 254 | 3 002 254 | 3 004 254 |
| 50 | 0.1 | ±0.08 | ±0.1 | | 3 000 504 | 3 002 504 | 3 004 504 |
| 100 | 0.2 | ±0.2 | ±0.2 | | 3 000 904 | 3 002 904 | 3 004 904 |
| 5 | 0.02 | ±0.02 | ±0.02 | ST-PTFE | 3 000 055 | 3 002 055 | 3 004 055 |
| 10 | 0.02 | ±0.03 | ±0.05 | | 3 000 105 | 3 002 105 | 3 004 105 |
| 25 | 0.05 | ±0.04 | ±0.05 | | 3 000 255 | 3 002 255 | 3 004 255 |
| 50 | 0.1 | ±0.08 | ±0.1 | | 3 000 505 | 3 002 505 | 3 004 505 |
| 100 | 0.2 | ±0.2 | ±0.2 | | 3 000 905 | 3 002 905 | 3 004 905 |
| 5 | 0.02 | ±0.02 | ±0.02 | ST-glass two-way stopcock | 3 000 056 | 3 002 056 | 3 004 056 |
| 10 | 0.02 | ±0.03 | ±0.05 | | 3 000 106 | 3 002 106 | 3 004 106 |
| 25 | 0.05 | ±0.04 | ±0.05 | | 3 000 256 | 3 002 256 | 3 004 256 |
| 50 | 0.1 | ±0.08 | ±0.1 | | 3 000 506 | 3 002 506 | 3 004 506 |
| 100 | 0.2 | ±0.2 | ±0.2 | | 3 000 906 | 3 002 906 | 3 004 906 |

for brown graduation add „B“ behind the order number (not available for amber glass)